




ORDER OF THE ENGINEER LINK 128: CSRA-SFPE INDUCTION APPLICATION FORM

CSRA-SFPE c/o Rob Plonski 2011 Autumn Chase SC 29229	Se Contact Rob Plonski with questions: Rob@enc-eng.com 505-660-1057			
ELIGIBILITY:	Any engineer is eligible for induction if he or she has graduated from an EAC of ABET program or holds a license as a Professional Engineer in the United States. Students enrolled in EAC or ABET degree programs are eligible if they are within one academic year of graduation.			
Name:				
Local Address:				
Permanent Address:				
Local Phone: Permanent Phone:				
Graduation Date:	School:			
Degree / Major:	Pinky Ring Size*:			
How do you want your name to appear on the certificate?				
Number of persons attending (family / friends welcome):				
•	te, card, and lifetime membership are optional but will be the responsibility of each individual			

* Ring Size: Pinky finger of your working hand (the hand you use to write/sign with)

HOW TO DETERMINE YOUR RING SIZE

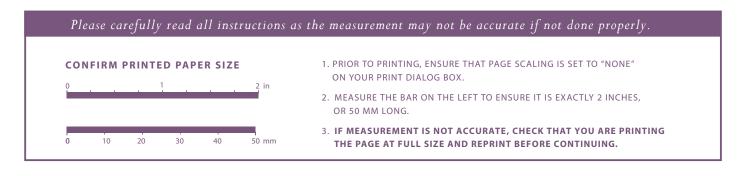

METHOD A -MEASURE FINGER WITH PAPER SIZER

- 1. Carefully cut along the outline of the sizer. Make a small slit in the left end of the sizer.
- 2. Wrap the sizer around the intended finger with the numbers facing out.
- 3. Slide the pointed end of the sizer through the slit.
- 4. Move the sizer to the largest part of the finger, this may be the knuckle.
- 5. Pull tightly. The sizer must fit snugly to produce an accurate size.
- 6. The number that lines up at the slit represents the ring size for that finger.



NOTES FOR ACCURATE MEASURING - Avoid measuring cold fingers as this is when fingers are at their smallest. - Measure your finger when it is at its largest, at the end of the day.



diameter

RING SIZE to MILLIMETER (circumference)

Size 3	44.0 mm	Size 8.5	58.4 mm
Size 3.5	45.2 mm	Size 9	59.7 mm
Size 4	46.5 mm	Size 9.5	60.9 mm
Size 4.5	47.8 mm	Size 10	62.2 mm
Size 5	49.0 mm	Size 10.5	63.5 mm
Size 5.5	50.3 mm	Size 11	64.7 mm
Size 6	51.7 mm	Size 11.5	66.0 mm
Size 6.5	53.1 mm	Size 12	67.2 mm
Size 7	54.3 mm	Size 12.5	68.5 mm
Size 7.5	55.6 mm	Size 13	69.7 mm
Size 8	57.2 mm	Size 13.5	71.0 mm

METHOD B - MEASURE CURRENT RING

- 1. Select a ring that properly fits the intended finger. The "ring finger" is located between the little finger and middle finger. Engagement and wedding rings are traditionally worn on the ring finger on the left hand in the United States.
- 2. Place the ring over the circles below, matching the inside edge of the ring to the circle nearest in size. This measurement refers to the *diameter* of the ring.
- 3. If the ring falls between two sizes, order the larger size.

